


**XK/XJ SERIES  
VEHICLE CARE  
HANDBOOK  
SUPPLEMENT  
JJM 10 16 18/001**

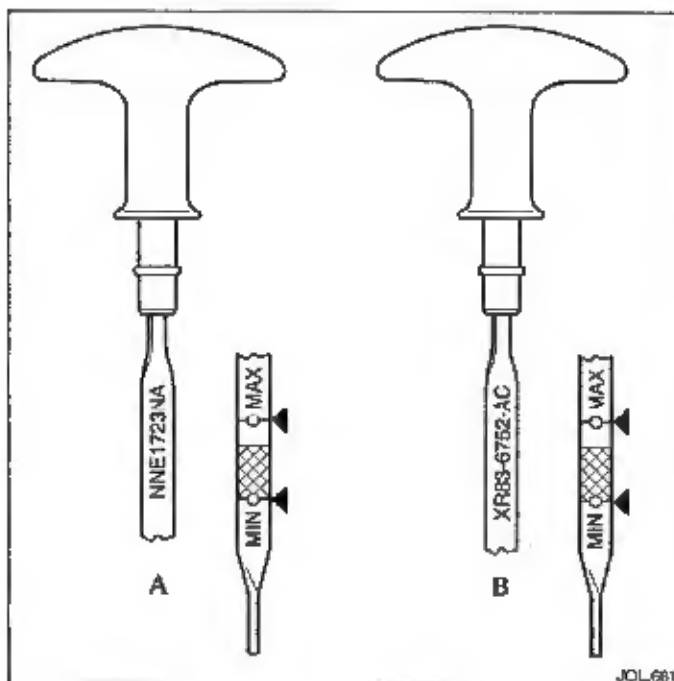

## Engine Lubrication System

This information complements/replaces the existing information in Section 3 - Routine Checks, related to engine oil capacity and checking the oil level.

### Introduction

Modifications have been made to the engine lubricating system, part of which, is a new dipstick and an increase in oil capacity.

The modifications were effective from the following VINs:

XK Series - A00367 and XJ Series - F00464.

### Dipstick Identification

Both versions of the dipstick look similar, but may be identified by the part number stamped near the top. These are:

Pre-modification ('A' on illustration) - NNE1723NA.

Modified version ('B' on illustration) - XR83-6752-AC.

### Oil Capacity

As a result of the modifications, the oil capacity for 3.2L, 4.0L, Normally Aspirated and Supercharged engines has increased nominally by:

1 Litre (1.75 Imp Pints) (1.06 US Quarts).